

RVON Bezvijčane stezaljke za vodiče

U_i 450 V	V0 UL94			In max. 32 A	Ta -10..+85 °C	IP 20
----------------	-------------------	--	--	---------------------------	--------------------------	-----------------

TRACON	mm ²	L (mm)	W (mm)	H (mm)
RVON2	2 × 0.2-4	13.2	20.1	9.5
RVON3	3 × 0.2-4	18.8	20.1	9.5
RVON5	5 × 0.2-4	30	20.1	9.5





RVON2



RVON3




RVON5

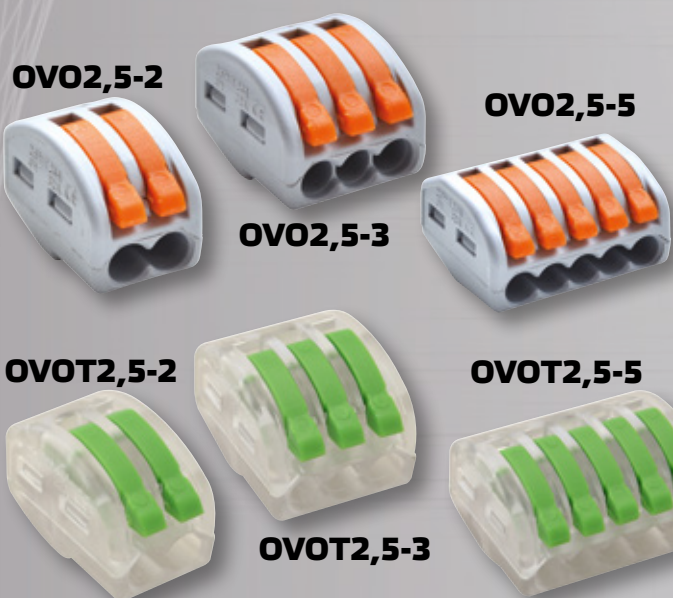

V0 UL94			U_i 400 V	IP 20	In max. 32 A	Ta -10..+55 °C
-------------------	--	--	----------------	-----------------	---------------------------	--------------------------

TRACON	mm ²	L (mm)	W (mm)	H (mm)
OVO2,5-2	2 × 0.5-4	12.4	20.5	14.5
OVO2,5-3	3 × 0.5-4	17	20.5	14.5
OVO2,5-5	5 × 0.5-4	26.6	20.5	14.5
OVOT2,5-2	2 × 0.5-4	12.4	20.5	14.5
OVOT2,5-3	3 × 0.5-4	17	20.5	14.5
OVOT2,5-5	5 × 0.5-4	26.6	20.5	14.5

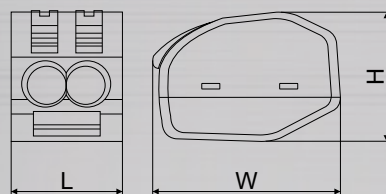

V0 UL94			U_i 400 V	IP 20	In max. 24 A	Ta -10..+55 °C
-------------------	--	--	----------------	-----------------	---------------------------	--------------------------

TRACON	mm ²	L (mm)	W (mm)	H (mm)
OLC11D	1×0,5-2,5 1×0,5-2,5	42.6	10.6	16.4
OLC11	1×1-2,5 1×0,5-2,5	20.5	8.1	15.1
OLC21	2×1-2,5 1×0,5-2,5	20.5	9.7	15.6



OLC21

